



# K4-L SPOT ( Compact LED Spot )

## Introducing the ALS K4-L

"A compact yet powerful 200W LED moving head delivering precision optics, vibrant colors, and dynamic gobo effects — designed for events, stages, and installations."

### Key Features:

ALS Professional – 200W LED Moving Head

**Powerful Light Output** – Equipped with a 200W high-brightness LED, delivering sharp, vibrant beams suitable for mini concerts, theatres, and events.

**Long Lifespan** – LED rated up to 20,000 hours, ensuring reliability and reduced maintenance.

**Advanced Optics** – 22° precision beam angle with high-quality lenses for crisp gobos and rich color mixing.

**Dynamic Color System** – 8 vibrant colors plus open on the color wheel, with rainbow chase effect for eye-catching transitions.



**Creative Gobo Effects** – Includes static and rotating gobo wheels, each with 8 patterns plus open, perfect for projection and visual texture.

**Flexible Movement** – Smooth 540° pan and 270° tilt with 16-bit precision for accurate positioning.

**Enhanced Effects** – Bi-directional 4-facet prism, motorized zoom and focus to create dynamic looks.

**Smart Control** – DMX512 and RDM compatibility with LCD display for easy setup and integration.

**Compact & Durable** – Lightweight at only 10.5 kg, with rugged housing for touring and installations.

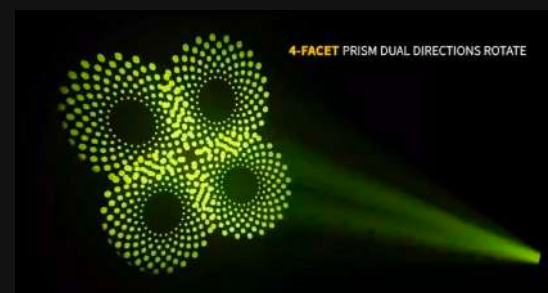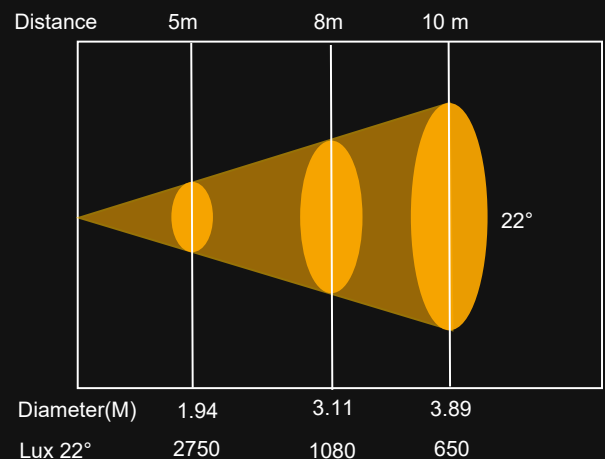



## K4-L SPOT ( Compact LED Spot )

### Technical Specifications

Light Source : 200W LED  
Rated lifespan: 20,000 hours

Optical System  
Beam angle: 22°  
Precision optical design

Control & Program  
LCD Display  
Protocols: DMX512, RDM  
16 channels

Movement  
Pan: 540° (16-bit)  
Tilt: 270° (16-bit)

Color System  
1 × Color Wheel: 8 colors + open (rainbow chase effect)

Gobos  
1 × Static Gobo Wheel: 8 gobos + open (chase effect)  
1 × Rotating Gobo Wheel: 8 high-precision glass gobos + open

Prism & Effects  
1 × Bi-directional 4-facet prism  
Motorized Zoom & Focus

Electrical & Connectors  
Input Voltage: 100–240V AC, 50/60Hz  
Power Consumption: 280W  
Data In/Out: 3-pin XLR

Work Environment  
Operating Temp: 0°C – 55°C  
Protection Rating: IP20 (indoor use only)

Size & Weight  
Dimensions: 306 × 265 × 454 mm  
Net Weight: 10.5 kg



**“Engineered for performance. Designed for impact.  
ALS Professional – Your partner in creating unforgettable experiences.”**